


Drying cabinet TS 62



Drying cabinet TS 62

Very low energy consumption, 0.55 kWh/kg*, and very short drying time, 35 minutes*. The cabinet works with a humidity sensor and has double fans and air-channels which create a perfect balance between evacuated and re-circulated air.



A large display shows with symbols and text, information during the drying process. Manual or automatic programs. The automatic program dries the clothes until they are dry, not a minute longer thanks to our own Humidity Tracking System (HTS).


Standard equipment

- 3 temperature levels for the manual programs and 2 automatic programs; cabinet dry and iron dry.
- Capacity, up to 8 kg.
- The doors open 190°.
- The unique, hanging frame, which also is turnable, can be rotated 180°. This makes it easier to handle the laundry.
- The hanging frame has 18 arms and a complete hanging length of 16 m.
- Lighting, inserted.
- Round base door catch magnets. Rubber coated to protect paintwork.
- Double overheat-protection (electrical and electromechanical) for increased security.
- The feet are adjustable from the inside of the cabinet.
- The top is removable for easier handling and installation.
- Test program and error codes make it easier to find what is wrong. Updated setup mode with possibilities to adjust the function of the cabinet.
- Choose between Swedish, English, French, German and Spanish instructions.



The unique hanging frame (turnable) can be rotated 180°. This makes it easier to handle the laundry.

*Single bar
Part no 131070*



*Hook rack, set of three
Part no 131071*

Optional extras

- Can be ordered with left-hand hanging frame
- Can be ordered with single rack bar
- Hook rack, set of three



HTS...
Humidity Tracking System



Ideal for delicate garments that are not suitable for tumble dryers.

Main specifications

| | TS 62 |
|----------------------------|---------------------|
| Loading capacity, kg/lbs | up to 8 kg/17,6 lbs |
| Drying capacity, g/min * | 91 |
| Hanging length, m | 16 |
| Drying time, min * | 35 |
| Evacuated air, max, m³/h | 340 |
| Heating effect, kW | 6,0 |
| Total effect, kW | 6,3 |
| Energy consumption/kg, kWh | 0,55 |
| Part No | 131025 |

*Drying of 6 kg cotton (dry weight), washed and high-spinned to 53% residual moisture. The cabinet works another 15 minutes with cool-down after the textiles are dry. Compared to earlier models, this cabinet has 25% lower energy consumption!

certway

PODAB uses Certways templates and guidelines for environmental and quality management in accordance with ISO 14001:2004 and ISO 9001:2008.



Technical specification

In mm

TS 92

| Electrical connections | |
|------------------------|-------------------|
| Electrical connection* | 3~N, 400 V, 50 Hz |
| Fuse, A | 16 |
| Total effect, kW | 9,3 |
| Heating elements, kW | 9,0 |

| Air connections | |
|---------------------------------------|-----|
| Outlet exhaust, \varnothing mm/inch | 160 |
| Outlet air flow, m ³ /h | 300 |
| Pressure drop, max Pa** | 260 |



| Sound level | |
|-----------------------------|----|
| Airborne sound level, dB(A) | 59 |

| Shipping data | |
|---------------------------------|---------|
| Net, kg/lbs | 235/518 |
| Crated, kg/lbs | 40/88,2 |
| Shipping data net, kg/lbs | 275/606 |
| Shipping volume, m ³ | 1,76 |

| Optional extras | |
|--|--------|
| Air exchanger 1 vent., 125 mm/4,9 inch | 141009 |
| Air exchanger 2 vent., 160 mm/6,3 inch | 141018 |
| Hook rack, set of three | 131071 |

| Dimensions | |
|-----------------|----------|
| Width, mm/inch | 1800/71 |
| Depth, mm/inch | 800/31,5 |
| Height, mm/inch | 1955/77 |

* Other voltage on request.

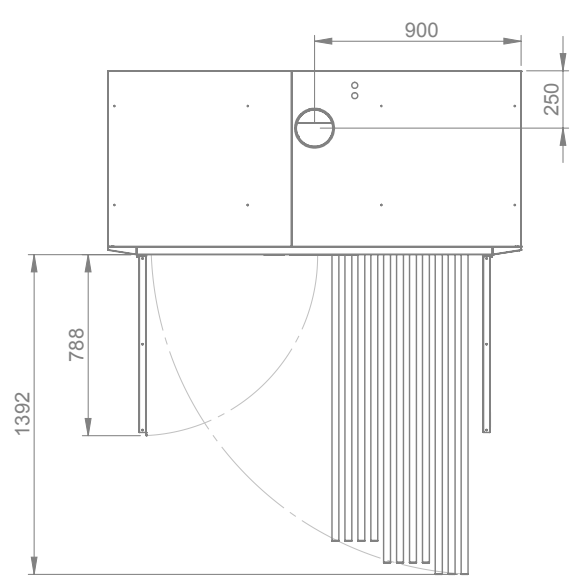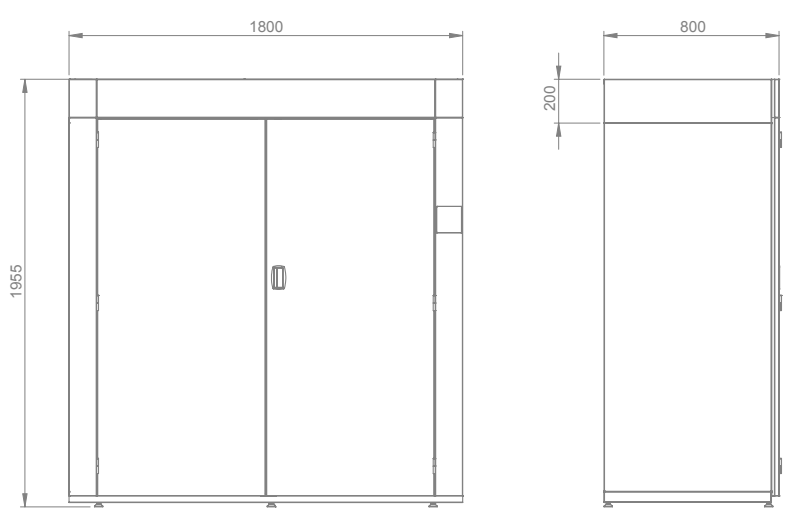

A = Electrical connection
B = Exhaust

TS 92